

# Safe&Stop+

## **ACTIVE SYSTEMS**




**Safe&Stop+**, suiting to vehicles wider than 1,5m, immediately alert the operator through visual and acoustic alerts. Detection is based on a pair of CySens sensors installed in the rear part of the vehicle. In addition the system can intervene on the speed of the vehicle (\*) in two steps strongly reducing the risk of collision and accident.

(\*) to be confirmed according to the vehicle features

### **✓** TWO ULTRASONIC SENSORS

- ✓ DETECTION DISTANCE UP TO 4 M DETECTION WIDTH UP TO 4 M (SIDE RECEIVERS CAN'T BE DE-ACTIVATED)
- **V** MINIMIND ADVANCED DISPLAY
- **V** COMPACTNESS FOR MAXIMUM INTEGRATION
- **WIDE RANGE OF CUSTOMIZABLE PARAMETERS**

# COMPLETE SYSTEM Safe&Stop+

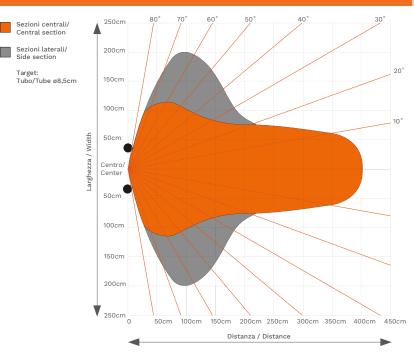

System architecture is based on the display as main element. Once connected to the vehicle it provides power supply to the sensors and the interfacing with the vehicle.

#### **KIT CONTENTS**

#### Display kit inclusive of:

- MiniMind advanced display and related brackets;
- connectors/contacts/seals kit;

#### Sensor kit inclusive of:

- CySens ultrasonic sensor pair;
- connecting cables;

Number of sensors

**Operating voltage** 

Activation trigger voltage

- brackets, bolts, washers kit;
- connectors/contacts/seals kit.

#### **User manual and CE Conformity Declaration**



DISPLAY

SAFETY IMPROVEMENT SYSTEMS

33 3			
Operating current	500mA max		
Output	1x relay out COM/NC/NO for A1 status (yellow alarm and optional sensor)		
	1x relay out COM/NC/NO for A2 status (red alarm)		
Applied norms/directives	2006/42/CE - 2014/30/CE - UNI EN ISO 12100		
Official normative definition	safety component		

SENSOR TECHNICAL FEATURES		DISPLAY TECHNICAL FEATURES	
Technology	ultrasound	Visual feedback type	RGB LEDs (adjustable brightness)
<b>Operating Frequency</b>	40kHz	Acoustic feedback type	Piezoelectric buzzer
Number of transmitters	1	Sound pressure level	85dB max (adjustable)
Number of receivers	3	IP Grade	IP50
Response time	100ms	Temperature range	-30°C / +80°C (electronic parts)
Dimensions	130mm x 80mm x 80mm	poq	
IP Grade	IP62 min	🚺 🕄 Utstyrspesialisten 🚗	
Temperature range	-30°C / +80°C (electronic parts)	000	

Kontakt oss: E-post: post@utstyrspesialisten.no Tlf: +47 919 92 837